





TreX is the world's first portable UV-C LED disinfection device to be time & cost efficient, environmentally friendly, built to disinfect confined areas.

TreX can go where other robots can't. With a compact size and wheeled chassis, TreX is designed as an efficient, portable disinfection unit.



UV-C LED Technology



99.9% Disinfection Rate



Mercury Free






99.9% DISINFECTION EFFICACY



TreX Key Features

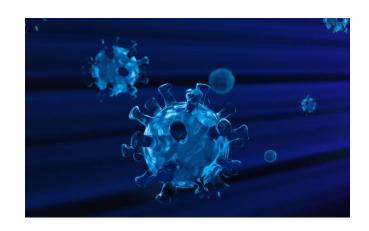





Effective Disinfection

- OTSAW's patented UV-C technology ensures 99.9% efficacy within 5 minutes at a range of 2.5 meters
- Disinfects bacteria and viruses in the air and on surfaces

Storage and Portability

- Portable and compact in size
- Wheel to bathrooms, hotel rooms, kitchen areas, and other areas as needed

Public Confidence

Ensure public confidence in patrons, customers or guests, feeling safer knowing that the venues are taking additional steps in the disinfection process.



TreX Specs

UV-C LED

Disinfects confined spaces such as offices, lavatories, bars, kitchen and service galleries

Compact Size

TreX measures 30x30x100cm and weighs only 30kg

Easy Operation

Pre-set disinfection timer with motion detection sensor for safety

 Remote access to switch the module on and off





Throughout the pandemic, much importance has been placed on washing and disinfecting our hands, as a measure of stopping the spread of coronavirus.

But what about our everyday environments?


Our offices, living spaces, shopping malls and even the air in our indoor spaces? It is not practical, sustainable or scalable to regularly disinfect all these surfaces and spaces.

TreX and OTSAW's UV-C LED technology is the next evolution to sanitize our *environments*.







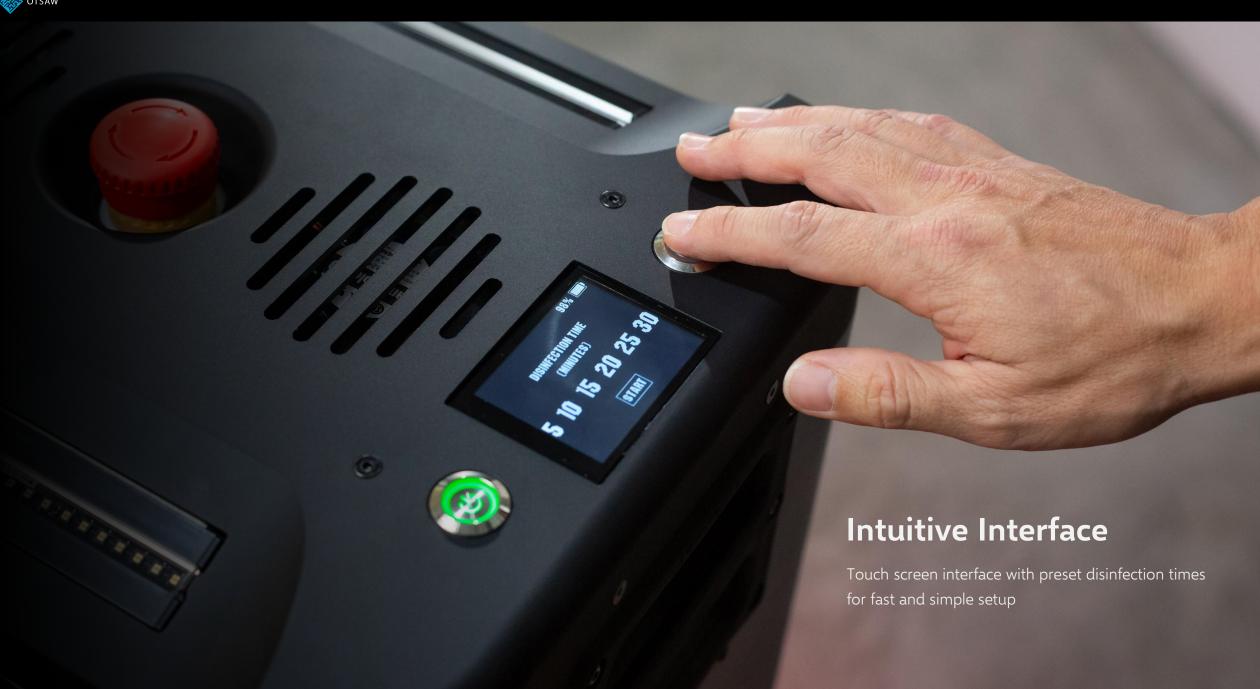



UV-C LED Test Results

OTSAW's U-VC modules have been lab tested to prove 99.9% efficacy within a 2.5 meter range.



TEST REPORT: 7191238316-CHM20-01-RC

09 JUN 2020



RESULTS

: UV-C Module from OTSAW O-RX UV-C LED Disinfection Robot Product

: Escherichia coli (ATCC 8739) Test Microorganism

Test Condition	Distance	Timing	Mean Untreated Count (CFU)	Mean Treated Count (CFU)	Reduction Percentage (%)
1	2.5 meter	10 minutes	1 000 000	Less than 10	More than 99.999
2	2.5 meter	20 minutes		Less than 10	More than 99.999
3	2.5 meter	30 minutes		Less than 10	More than 99.999
4	2.0 meter	10 minutes		Less than 10	More than 99.999

Remarks:

The above test results relate to the sample as received.

MS AW HWEE YING

HIGHER TECHNICAL EXECUTIVE


MR RANDY CHIN KOK FEI PRODUCT MANAGER MICROBIOLOGY CHEMICAL & MATERIALS

The OTSAW Disinfection Ecosystem

Lab-tested against human Coronavirus



99.9% DISINFECTION EFFICACY

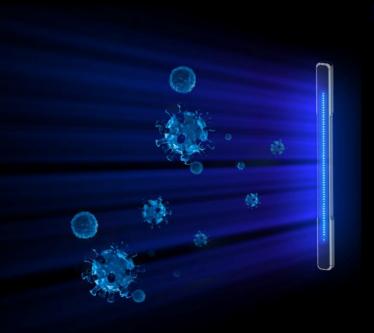






For Disinfection of Air Fixed installation within HVAC Systems



For Fully Autonomous Disinfection
UV-C LED Mobile Robot

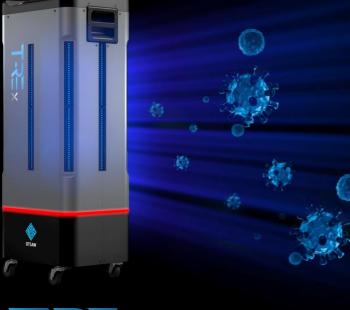



Multi-use Portable Disinfection


Easy to deploy to confined spaces




Integration in the UV-C Disinfection Ecosystem

See how TREX can work along with AirGuard and O-RX to create a comprehensive disinfection solution for a variety of use cases:

Retail & Shopping Malls

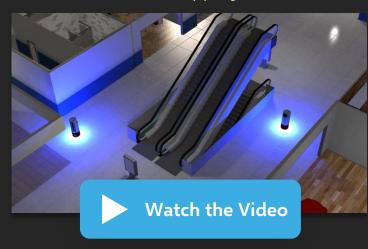


Hotels & Hospitality

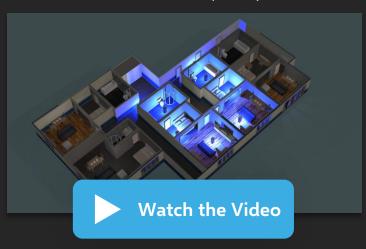

Office & Workspaces




Hospital & Healthcare

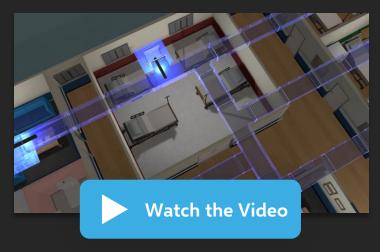



UV-C LED Advantage

- Long range and controllable disinfection direction
- Non-hazardous material does not contain mercury vapor, unlike conventional UV Lamps
- Mercury Free: mercury is a banned substance in most industries
- Low power consumption and long lasting LED lamps
- Life span of LED > 3 years
- Durable LED strips

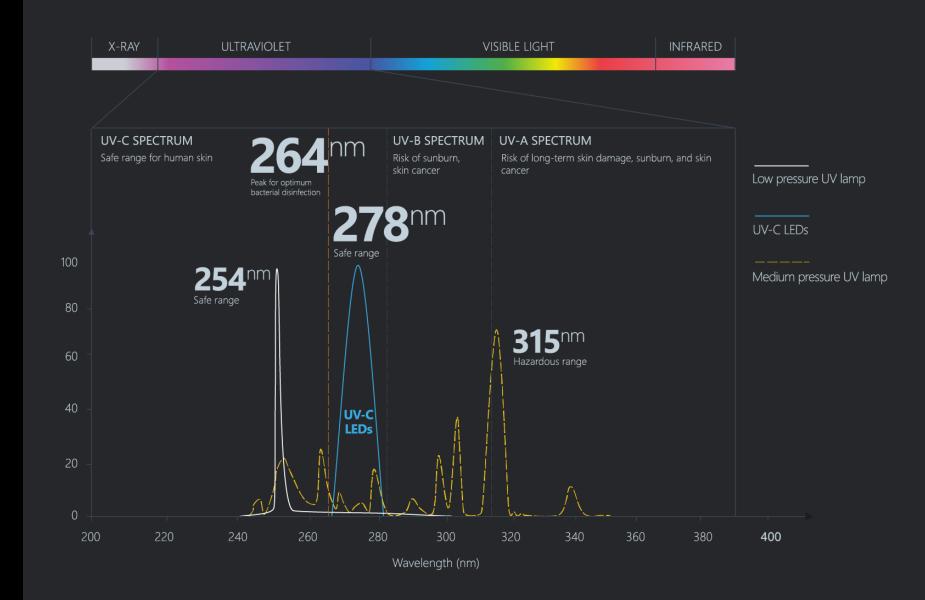





UV-C LEDs vs UV Mercury Lamps

Ultraviolet germicidal irradiation (UVGI) is a cost- effective and practical method of inactivating viruses and bacteria.

Existing high-power UVGI systems use UV lamps for large-scale disinfection.

UV-C LED holds many
advantages over conventional
UV lamps in efficiency,
efficacy, safety and in
environmental concerns.

Characteristic	UV-C LEDs	UV Lamps	
Safe against human skin	Within safe UV-C range	Range overlaps UV-A, UV-B & UV-C	
Power consumption	Approx 300W	Approx 1000W	
Size	⊘ Compact	Bulky	
Time to reach full brightness	Instantaneous	1 - 15 minutes warm-up	
Irradiance	⊗ 8.6 uW/cm²	3 uW/cm²	
Angle	Directional	Omnidirectional	
Lifespan		1 year	
Operating hours		2.5 hours	
Mercury content	None (Environmentally friendly)	Contains mercury (Environmentally hazardous)	
Voltage operation	Low voltage operation	High voltage operation	
Maintenance	Maintenance-free	Requires bulb replacement and routine cleaning	
Ozone production	Zero. Safe for humans	Produces ozone, hazardous to respiratory tract	
Durability	Durable and solid construction	Fragile and dangerous	



otsaw.com





